查询P140KH1-Y25BR500供应商

Model P140
14mm Rotary Potentiometer
Dual Unit
Conductive Plastic Element
With / Without Bushing
Insulated Shaft
RoHS Compliant

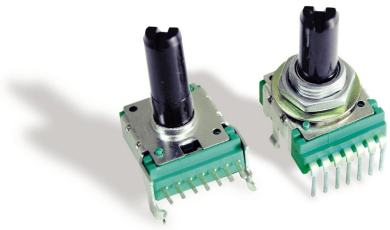

MODEL STYLES

Side Adjust, without Bushing	P140KV
Side Adjust, with Bushing	P140KV1
Top Adjust, without Bushing	P140KH
Top Adjust, with Bushing	P140KH1

ELECTRICAL[1]

Resistance Range, Ohms	500-1M
Standard Resistance Tolerance	± 20%
Residual Resistance	20 ohms max.
Input Voltage, maximum	50 Vac max.
Power rating, Watts	0.05w
Dielectric Strength	500Vac, I minute
Insulation Resistance, Minimum	100M ohms at 250Vdc
Sliding Noise	100mV max.
Gang Error (Multi-ganged)	-40dB – 0dB, ±3dB
Actual Electrical Travel, Nominal	270°

MECHANICAL

Total Mechanical Travel	300°± 10°
Static Stop Strength	70 oz-in
Rotational Torque, Maximum	2.5 oz-in

ENVIRONMENTAL

Operating Temperature Range	-20°C to +70°C
Rotational Life	30,000 cycles

[1] *Specifications subject to change without notice.*

BI Technologies Corporation
4200 Bonita Place, Fullerton, CA 92835 USA
Phone: 714 447 2345 Website: www.bitechnologies.com

TT electronics
BI technologies

Model P140

ORDERING INFORMATION[2]

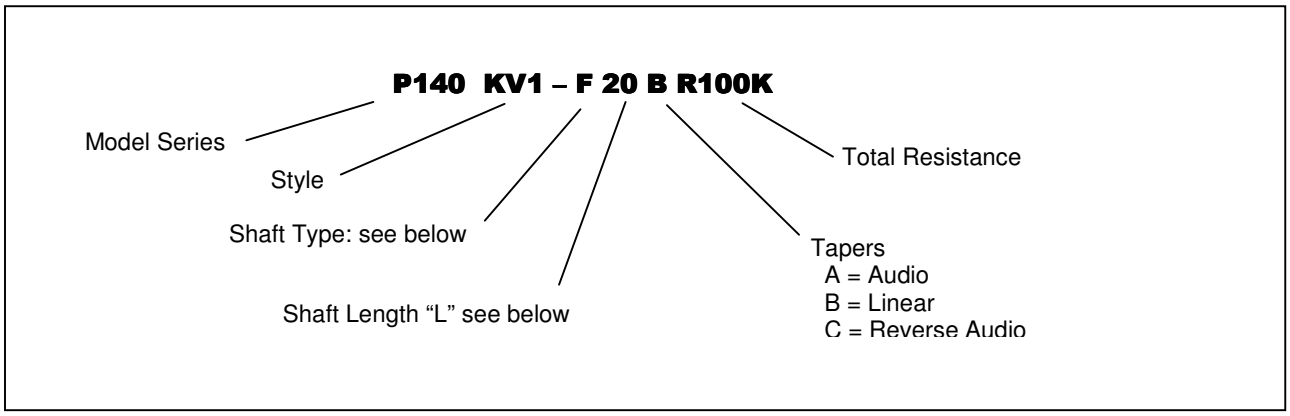

Shaft Types

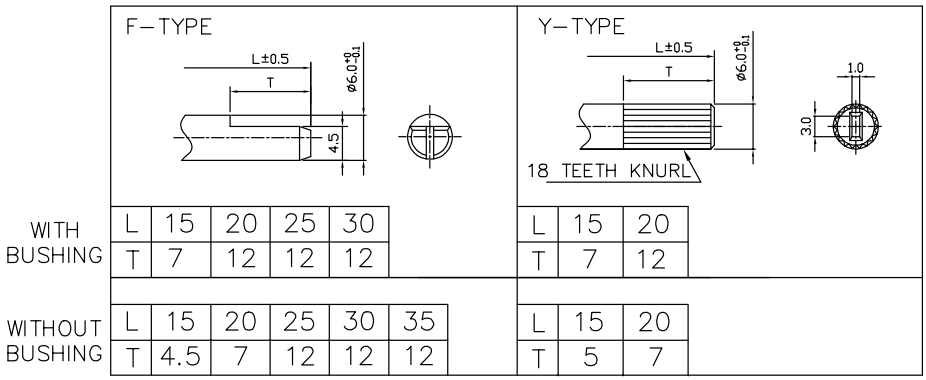

WITH BUSHING	L	15	20	25	30	
	T	7	12	12	12	
WITHOUT BUSHING	L	15	20	25	30	35
	T	4.5	7	12	12	12

L	15	20	
T	7	12	
L	15	20	
T	5	7	

STANDARD RESISTANCE VALUES, OHMS

500	1K	2K	5K	10K	20K	50K	100K	200K	500K	1MEG

[2] *Contact our customer service for custom designs and features.*

Model P140

OUTLINE DRAWING

Model P140KV (Side Adjust, without Bushing)

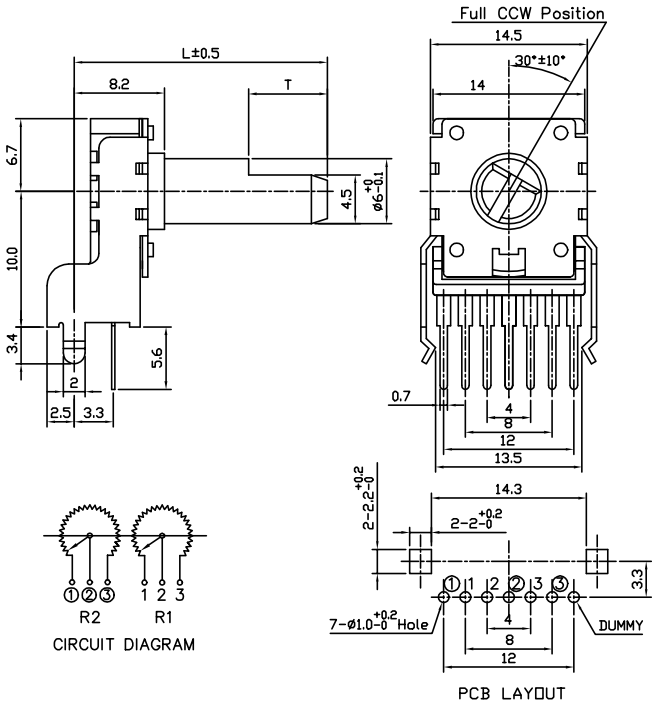

Model P140KV1 (Side Adjust, with Bushing)

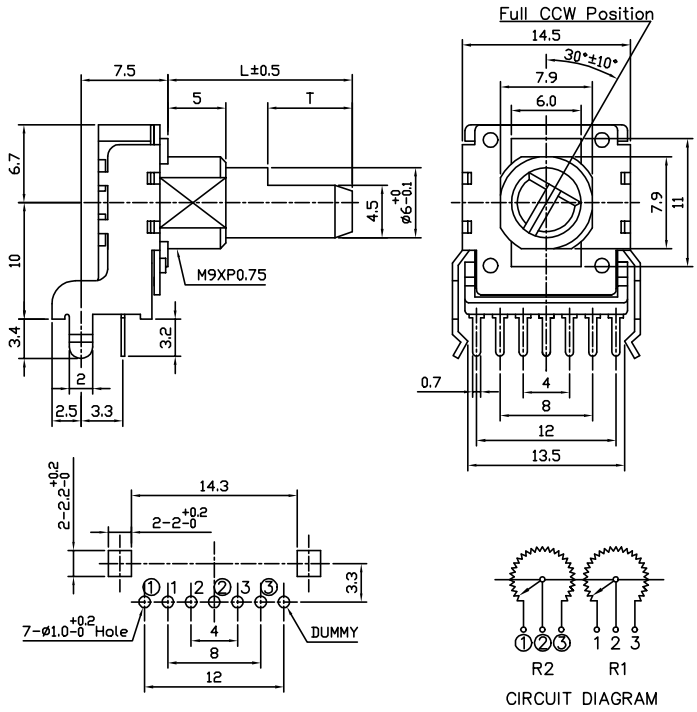

BI Technologies Corporation
4200 Bonita Place, Fullerton, CA 92835 USA
Phone: 714 447 2345 Website: www.bitechnologies.com

Model P140

Model P140KH (Top Adjust, without Bushing)

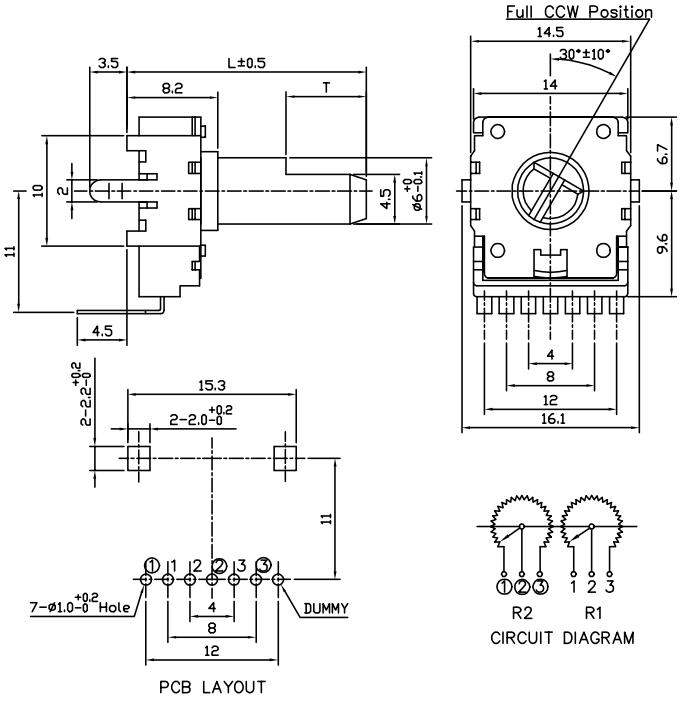

Model P140KH1 (Top Adjust, with Bushing)

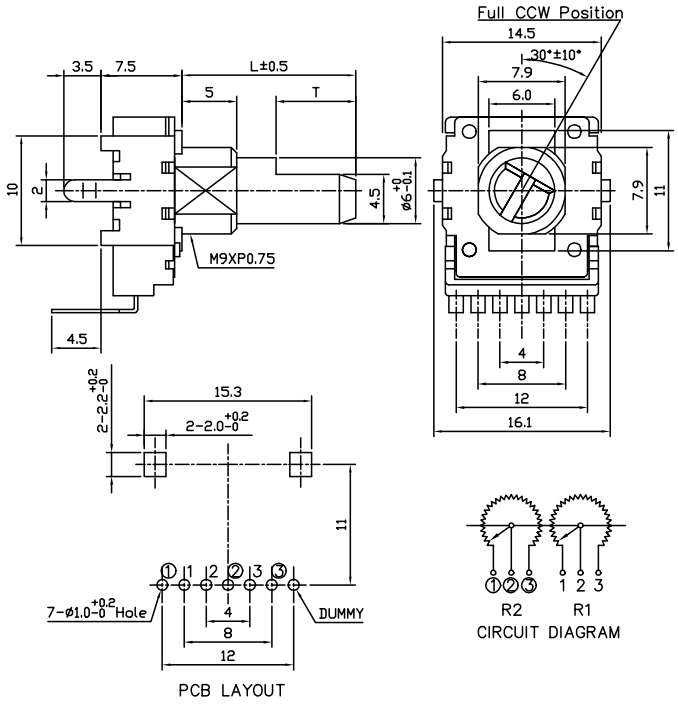

BI Technologies Corporation
4200 Bonita Place, Fullerton, CA 92835 USA
Phone: 714 447 2345 Website: www.bitechnologies.com

TT electronics
BI technologies